


INSTALLATION

3

Assembly the frame and plinth by 8 sets M6-12 screws and M6 flange nuts.





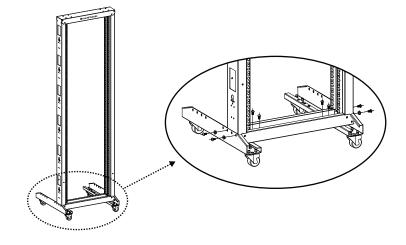

After assembly, please adjust the diagonal size of the cabinet to ensure homogeneous space for all doors and all doors work well.

ACCESSORIES


Standard Rack Shelf	Vertical Cable Manager	Rack Mounting Hardware	Cable Management Solutions
SRS-1U-10	VCM-2-22U		CMS-1-PC
SRS-1U-10V	VCM-2-32U	RMH-1032-K	CMS-1-MH
SRS-1U-15	VCM-2-42U	RMH-1032-C	CMS-1-MC
SRS-1U-15V		RMH-1032-S	CMS-1-PR
SRS-2U-10		RMH-1224-K	CMS-2-PC
SRS-2U-10V		RMH-M6-K	CMS-2-MH
SRS-2U-15		RMH-1224-S	CMS-2-MC
SRS-2U-15V	Drawer with Lock		CMS-2-PR
			CMS-1-BRS
	DWL-1U		LB-0-D
	DWL-2U		LB-2-D
	DWL-3U		LB-4-D
	DWL-4U		LB-6-D
			CNT-1

MAINFRAME 2-POST OPEN FRAME RACK SERIES

OFDR-2-22/32/42U

ASSEMBLY INSTRUCTION

V. 1.2

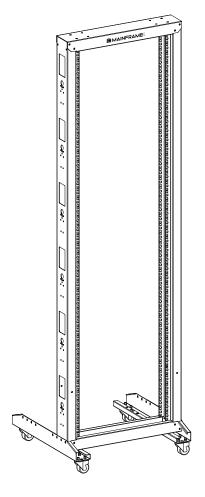



ASSEMBLY INSTRUCTION — OFDR-2-22/32/42U



ASSEMBLY INSTRUCTION — OFDR-2-22/32/42U



ITEM LIST






10-32 Screw and cage nut **x 20** for 22U Flange nuts x 30 for 32U x 40 **x 40** for 42U





Check the quantities of the items before assembly.

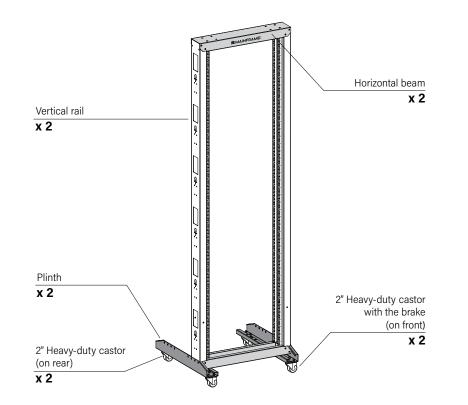

INSTALLATION




Assembly vertical rails and horizental beams to form the frame with 16 sets M6*12 screws and M6 flange nuts.





M6 Flange nuts x 16

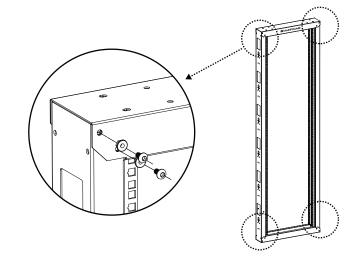

Assembly the castors on the Plinths by 16 sets M6*12 screws and M6 flange nuts.




M6-12 Screws x 16





M6 Flange nuts x 16





2

1