




DESCRIPTION

22/4 Stranded Bare Copper Conductors, Shielded with an overall jacket. Plenum Rated, 1000ft Pull Box

FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Supplied in a 1000ft Pull Box

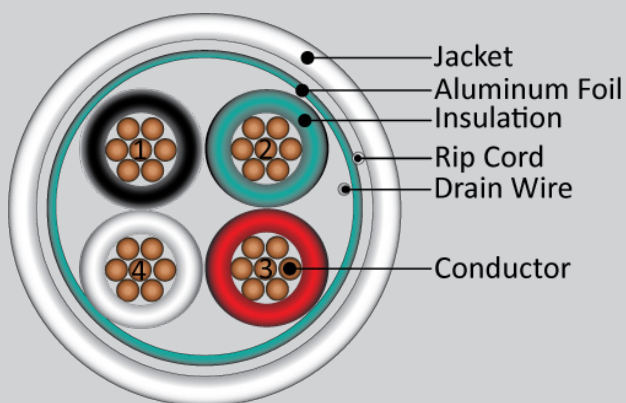

22AWG 4 CONDUCTOR SHIELDED PLENUM RATED

SKU: 210-224/S/P/WH

Conductor

Material	Bare Copper
Size	22AWG
Stranding	7 Strand (7x0.01in., 7x0.254mm)
Conductors	4 Conductor

Shielding

Drain Wire	Aluminum Foil 24AWG Strand Tinned Copper
------------	---

Insulation

Material	PL-PVC
Thickness	0.044 in. (1.12mm) Nominal
Colors	Black, Red, White, Green
Ripcord	Yes

Jacket

Material	PL-PVC
Thickness	0.0181 in. (0.46mm) Nominal
Overall Diameter	0.152 in. (3.86mm) Nominal
Color	White

Electrical Properties

Temp. Rating	-20°C ~ +75°C
DCR Conductor	55.4 Ohms/Km. @ 20°C
DCR Drain Wire	90.9 Ohms/Km. @ 20°C

Ratings/Approvals

NEC Article 800, UL Subject 444, CMP/CL2P (UL), RoHS Compliant

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 11/2014

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.