

16AWG 4 CONDUCTOR STRANDED (65 STRAND)




DESCRIPTION

16AWG, 4 Conductor, Stranded (65 Strand),
PVC Jacket, 1000ft, Spool

APPLICATION

- Intercom Systems
- Sound / Audio
- Indoor Applications
- ETL Listed, RoHS Compliant

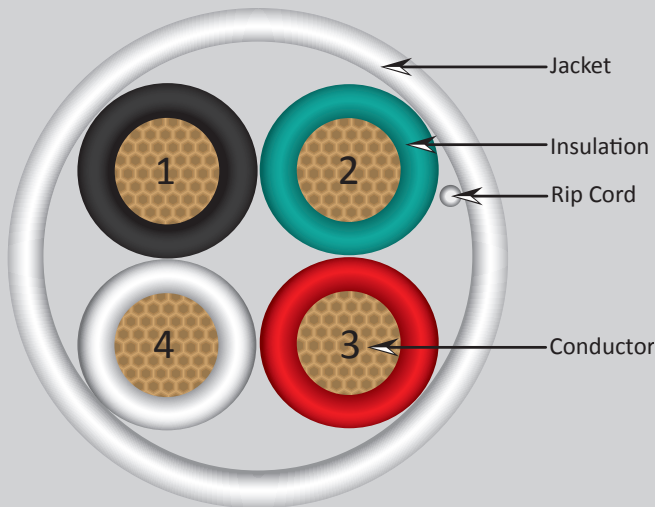

SKU: 209-2318

Conductor	4 Core (Stranded BC)
Material	Oxygen Free Copper Wire Strands
Size	16 AWG
Stranding	65 Strand
Strand Diameter	0.16 mm
Insulation	
Material	PVC
Average Thickness	0.31 mm
Min. Point Thickness	0.27 mm
Insulation Diameter (±0.05mm)	2.10 mm
Assembly Diameter (±0.05mm)	5.10 mm
Jacket	
Material	PVC
Color	White
Average Thickness	0.60 mm
Min. Point Thickness	0.54 mm
Outer Diameter (±0.1mm)	6.30 mm
Insulation Color	Black, Red, Green, White
Ripcord	
Material	Nylon (150D)
Electrical Performance	
Rated Temperature (°C)	75
Voltage Rating	30V
Reference Standard	ETL, CMR, CL3
Mechanical Characteristics	
Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus AUDIO CABLE 16 AWG 4 COND 65
STRANDED OXYGEN FREE SUN RES CMR FT4 CL3 RoHS XXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 01/2015

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.