



Tablet not included



Features: X-66 Professional Network Multi-Room Controller Amplifier

Distribute 6 stereo audio signals to 6 rooms simultaneously

Cascade-able for larger systems up to 18 zones

Includes **2 x Digistream-1 Wi-Fi streamers**

Stream music from your tablet or smart phone or use all the most popular streaming services.

Includes internet radio with 1000's of stations in every music genera

Direct Ethernet connection for complete Wi-Fi control from phones and tablets

Any source to any room simultaneously

Bi-directional RS232 control of all functions

Easy integration with master control systems

Six stereo analog audio inputs

One digital SPDIF optical audio input

Six stereo pre-amp outputs

Six discrete Infrared output ports / one master Infrared output port

Seven 12V trigger outputs

Master mute 12V trigger input

Switchable AGC automatic source gain control leveler

All zones (play source one) 12V trigger input (party mode or paging)

Free Control 4 and Compass Control Drivers available

Kit includes:

1 x X-66 master controller amplifier with 2 x Digistream-1 Wi-Fi streamers


1 x 2U Rack mounting kit

3 Year Warranty

1
Connect Your Speakers

2
Connect the LAN port to your router

3
Connect the power cable & press the power button

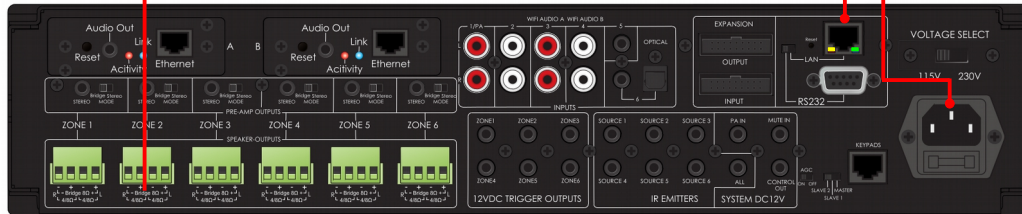

4
Download the X-66 App
FACTOR X-66

Open the App & Play

Download on iTunes

GET IT ON Google Play

Installation is so easy!

Available Drivers



All logos are the property of their respective owners

Specifications:

- RMS Power @ 8ohms 25 watts x 12
- RMS Power @ 4ohms 50 watts x 12
- RMS Power @ 8ohms 100 watts x 6 (bridge mode)
- S/N Ratio >85dB A Weighted
- THD <0.1%
- Frequency Response 20Hz-20kHz
- Input Impedance >47Kohms
- Input Sensitivity 250mv
- Amplifier Protection Overload, short circuit & thermal
- Trigger System on DC + 12V
- Trigger External Mute DC + 12V
- Infrared Frequency 38kHz
- Input Connectors 3.5mm stereo, RCA stereo, Digital SPDIF Optical
- Output Connectors Terminal Block, 3.5mm mono
- Power Supply AC115V/60Hz or 230V/50Hz switchable
- X-66 Ethernet:** 10/100Mbps RJ45 Connector
- Digistream-1 Ethernet paralleled
- Internally with X-66 Ethernet 10/100Mbps
- Digistream-1 DAC 24bit 192KHz
- Digistream-1 file support FLAC, WAV, AAC-LC, HE-AC,MP3, WMA

Power Consumption:

- Power Supply AC115V/60Hz or 230V/50Hz
- Power consumption 1250 watts

Dimensions:

- W- 19"/482.6mm w/rack kit
- W- 17"/430mm no/rack kit
- H - 3.5"/89mm / D - 16.4"/416mm
- Shipping Weight 25lbs (11kg)**

Optional Keypad Kits Available

X-66-WKP-KIT

X-66-BKP-KIT

