

Features:

- Ultra low profile 6" in-ceiling speaker system
- Trim-less architectural grille
- Blends in with ceiling pot lights
- Smooth-wide frequency response
- 6 inch full range woofer
- Fast installation spring clamps
- No screws required for installation!
- Screw down wiring strip
- Easy multi-speaker parallel wiring
- 6 watt full frequency 70V transformer
- 6 watt / 3 watt & 1.5 watt taps
- Sold as each
- Master carton 20pcs
- 10 year warranty



Specifications:

- Diameter Woofer 6" pulp fiber
- Power Handling 10 watts (RMS)
- Impedance 8 ohms (speaker)
- 5000 ohms @ 1 watt (transformer)
- Frequency Response 80Hz - 16kHz (± 10 dB)
- Dispersion 110 °
- Sensitivity 92dB (1W / 1M) Average


Transformer:

- Wattage 6 watts 70 volts
- Primary taps: 6,3,1.5 watts
- Secondary tap 8 ohms
- Frequency response 40Hz – 17kHz (± 5 dB)
- Insertion loss 2.0dB

Dimensions:

- Dimensions Overall 7.875" (200mm)
- Cutout Dimensions Speaker 6.85" (174mm)
- Depth 2.25" (57.15mm)
- Shipping Weight each 2lbs (0.9kg)
- Master Carton 20pcs
- Shipping weight master carton 32lbs 14.6Kgs
- Shipping dimensions 17x17x16"

One piece all-metal design

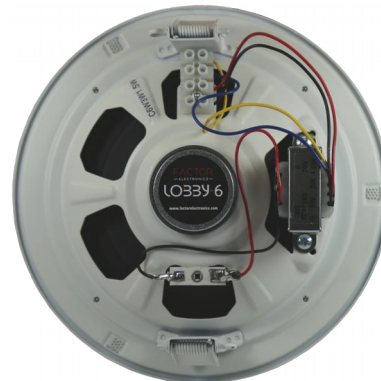

New "Ultra Fast" Spring Clamp Mounting System

