


# 3.5MM STEREO/2xRCA 6" M-F/F Y-CABLE (FT4/CMG)

SKUS RC-105


## **FEATURES**

- 3.5mm TRS Stereo Plug Male to Dual RCA Female Stereo Y-Cable 6" 28AWG
- Use to connect a digital music source to an audio sound system with mono outputs
- · Fully molded connectors provide strain relief
- · Foil shielded to prevent external EMI/RFI interference
- Gold-plated contacts for superior transmission, high reliability and durability
- Stranded conductors and drain wire are tinned to resist oxidation



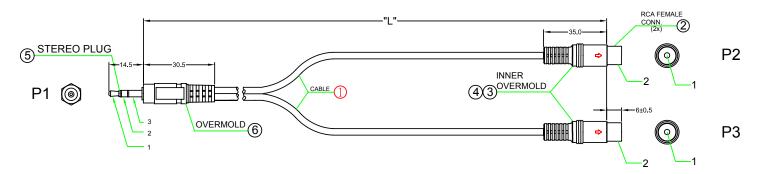

#### **PIN ASSIGNMENT:**



## **MATERIALS**

(1) CABLE	28AWG(7/ 0.127T)*1C+ Spiral Shield Jacket: CL2-PVC Black, OD:2.6±0.1mm Jacket Marking: E132276-A(UL) TYPE CMG 75°C CSA LL64151-A CMG 75°C FT4 28AWG
(2) RCA MALE CONN.	RCA Jack FEMALE, <i>Contact</i> : Gold Plated 1u" <i>Shell</i> : Gold Plated 1u" <i>Insulator</i> : A.B.S Black
(3) OVER MOLD	PVC 60P Colour: P2 White / P3 Red
(4) INNER MOLD	PE Molded
(5) STEREO JACK	ø3.5*ø6.0*L:2 4.0mm Stereo Plug MALE <b>Shell:</b> Gold Plated 1u" <b>Insulation:</b> Black
(6) OVER MOLD	PVC 45P. Colour: BLACK

### **SPECIFICATIONS**

TOLERANCE	$X.X \pm 0.20 \mid XX.X \pm 0.50 \mid XXX.X \pm 1.0$
CONDUCTANCE RESISTANCE	3 ohms (max.)
INSULATION RESISTANCE	10M ohms (min.)/300V DC 10/ms.
RC-105	6" (150mm±15mm)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

#### www.pccableworld.com