


3.5MM STEREO/2xRCA M-M/M Y-CABLE (FT4/CMG)

SKUS	RC-106S	(3')	RC-106E	(15')
	RC-106G	(6')	RC-106T	(25')
	RC-106L	(10')	RC-106X	(50')

FEATURES

- 3.5mm TRS Stereo Plug Male to Dual RCA Plug Male Y-Cable 6" 28AWG
- Use to connect an audio source to left and right auxiliary inputs on a stereo system
- Fully molded connectors provide strain relief
- Spiral shielded to prevent external EMI/RFI interference
- Gold-plated contacts for superior transmission, high reliability and durability
- Stranded conductors and drain wire are tinned to resist oxidation

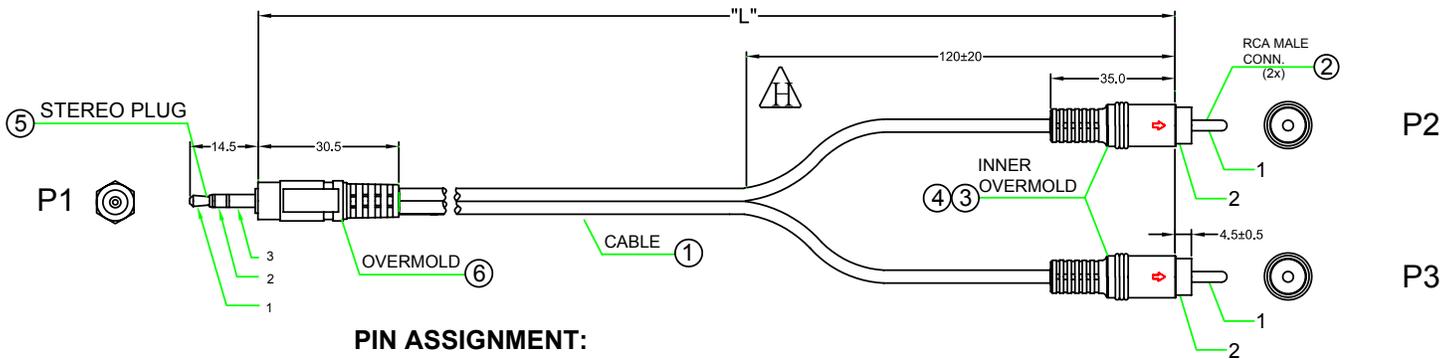

PIN ASSIGNMENT:

P1	P2	P3
1 — Signal (RED)	1	
2 — Signal (WHITE)	2	
3 — Spiral Shield	2 — 2	

MATERIALS

(1) CABLE	{28AWG(7/ 0.127T)*1C+ Spiral}*2F JACKET: (UL) TYPE CMG 75°C FT4 Black OD: 3.0*6.0±0.2mm (SPEC NO.:58308)
(2) RCA MALE CONN.	RCA Plug, Contact: Gold Plated 1u" Shell: Gold Plated 1u" Insulator: A.B.S Black
(3) OVER MOLD	PVC 60P Colour: P2 White / P3 Red
(4) INNER MOLD	PE Molded
(5) STEREO JACK	ø3.5*ø6.0*L: 24.0mm Stereo Jack FEMALE Shell: Gold Plated 1u" Insulation: Black
(6) OVER MOLD	PVC 45P. Colour: BLACK

SPECIFICATIONS

TOLERANCE	X.X ± 0.20 XX.X ± 0.50 XXX.X ± 1.0
CONDUCTANCE RESISTANCE	5 ohms (max.)
INSULATION RESISTANCE	10M ohms (min.)/300V DC 10/ms.
RC-106S	3FT (914mm±30mm)
RC-106G	6FT (1830mm±30mm)
RC-106L	10FT (3048mm±30mm)
RC-106E	15FT (4572mm±30mm)
RC-106T	25FT (7620mm±30mm)
RC-106X	50FT (15240mm±50mm)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.