

HDMI MALE TO VGA FEMALE WITH AUDIO



SKUS VA-HMVF

AVAILABLE COLOUR



FEATURES

- HDMI Type A Male to VGA Female, with a USB Micro-B Power Port and 3.5mm Female Audio Port
- Use to convert an HDMI input signal for use with VGA enabled displays and projectors with stereo audio
- Features a data transfer rate of up to 6.75Gbps and provides output with resolutions up to 1080p and UXGA (1600x1200).
- Converts digital HDMI to analog signal using a 10-bit DAC with audio being de-embedded from the HDMI signal
- Input and output signals are synchronized when converting HDMI signals into VGA
- Include if only space:
- Gold-plated connectors provide superior transmission, high reliability and durability

SPECIFICATIONS

ROHS COMPLIANT | 100% OPEN & SHORT & MIS WIRE TEST


TOLERANCE	.X ± .30 .XX ± .10 .XXX ± .05 (mm)
	.X ± .015 .XX ± .010 .XXX ± .005 (inches)
CONTACT RESISTANCE	2 ohms (max.)
INSULATION RESISTANCE	10M ohms (min.)
HI-POT TEST	DC 300V/10ms

© PC Cable World. All rights reserved.


PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com

HDMI MALE TO VGA FEMALE WITH AUDIO

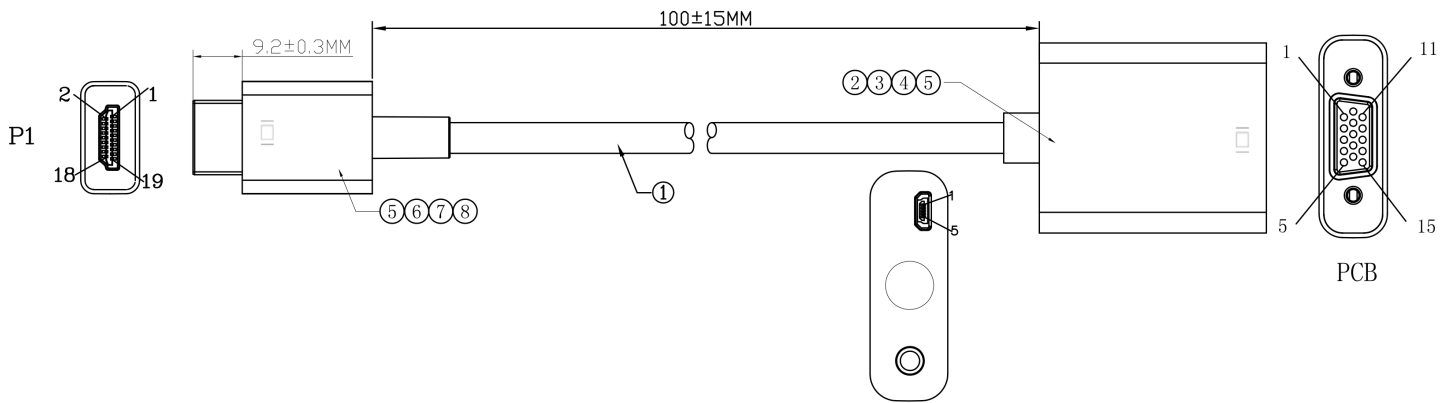

PIN Assignment

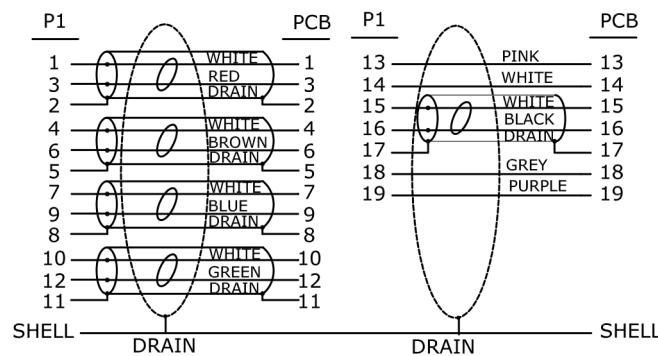

MATERIALS

(1)	CABLE	DisplayPort UL20276[34AWG(7/0.06TC)*1P+EAM]*5C+32AWG(7/0.08TC)*5C+AEB(16/5/0.12mm 85%AL) OD: 4.5mm Colour: Black
(2)	CONNECTOR	HA-V with PCB shell gold plated (IC:AG6200)
(3)	MOUNTING SCREW	#4-40 UNC H4. 75*8.6mm nickel plated nut (H=4.8mm)
(4)	COVER	VGA F ABS shell Colour: Black
(5)	OUTER MOLDING	45P PVC Colour: Black
(6)	INNER MOLDING	Transparent PE
(7)	CONNECTOR	HDMI A/M 19P black insulation shell gold plated
(8)	COVER	HDMI A/M ABS shell Colour: Black

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.