

DISPLAYPORT TO VGA M/M CABLE


SKUS	VC-792S	(3')	VC-792L	(10')
	VC-792G	(6')	VC-792E	(15')

FEATURES


- DisplayPort Male to VGA Male Video Cable 28 AWG
- Use to connecting your HDM equipped HDTV or monitor to the DisplayPort connector on your laptop and desktop
- Support 128-bit DPCP and support for 40-bit HDCP from ver 1.1 onwards
- Gold-plated pure copper conductors for maximum conductivity and bandwidth
- Molded thumb screws ensure a secure and reliable connection between VGA connector and VGA port



AVAILABLE COLOUR

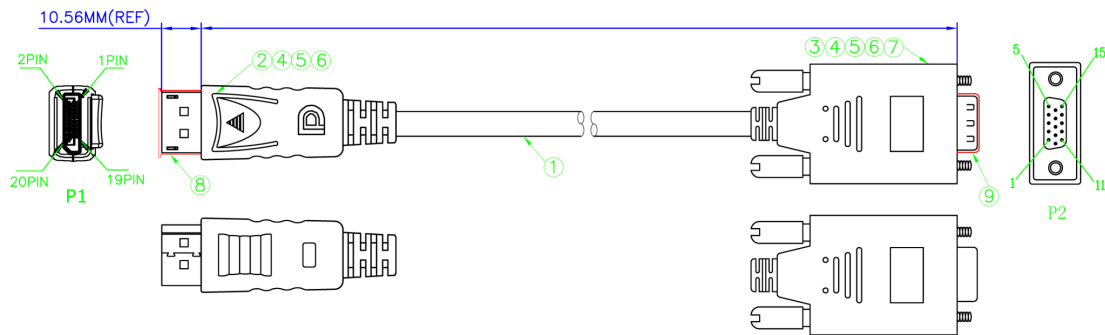

Pin Assignment

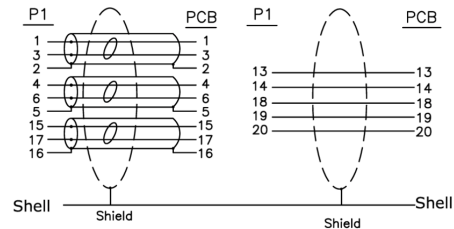

MATERIALS

(1)	DisplayPort Cable UL20276 [28AWG(7/0.127TC)*1P+D.W+AL+Mylar]*5+28AWG(7/0.127TC)*5C+AL/MY+D.W+BD+Jacket PVC Colour: Black, OD: 6.0±0.2mm
(2)	DisplayPort MALE, Insulation: Black, Material: LCP, Pin Gold Plated, Shell Gold Flash, with ABS Plastic Hood
(3)	DP to VGA Converter with VGA MALE, PCB+SMT, VGA Pin Gold Flash, Shell Gold Flash
(4)	S.R. Molding 45P PVC, Colour: Black
(5)	Inside Molding: PE
(6)	Copper Foil 360° Solder Type
(7)	Screw: #4-40UNC(2.8*58.25mm) Nickel Plated
(8)	Dust Cover for DP
(9)	Dust Cover for HDB

SPECIFICATIONS

ROHS COMPLIANT | 100% TESTED (OPEN, SHORT, MISS WIRE)

TOLERANCE .X ± 0.30 | .XX ± 0.10 | .XXX ± 0.05

CONDUCTANCE RESISTANCE 2 ohms (max.)

INSULATION RESISTANCE 10M ohms (min.)

HI-POT 100V DC/10ms

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com