

# HDMI 1.4 M/M CABLE (ALUMINUM BRAIDING)


SKUS	VC-554SA	(3')	VC-554TA	(25')
	VC-554GA	(6')	VC-554VA	(30')
	VC-554LA	(10')	VC-554XA	(50')
	VC-554EA	(15')		

## FEATURES

- HDMI 1.4 Type A Aluminum Braided High Speed with Ethernet Cable 24 AWG
- HDMI Specification Revision 1.4 Supports Dual Direction 1080p
- 15 micron hardened gold-plated contacts (24k) for superior transmission, high reliability and durability
- Three layer high density shielding for quality protection
- Twisted pair construction
- The addition of a HDMI Ethernet Channel allows IP enabled devices to communicate without a separate Ethernet cable
- An Audio Return Channel is included to allow the sending of audio data "upstream" from the TV to a surround sound audio system or A/V receiver, eliminating the need for a separate S/PDIF connection
- Support for 3 additional color spaces deliver sharper and higher quality digital still photography when viewed on an HDTV



## AVAILABLE COLOUR

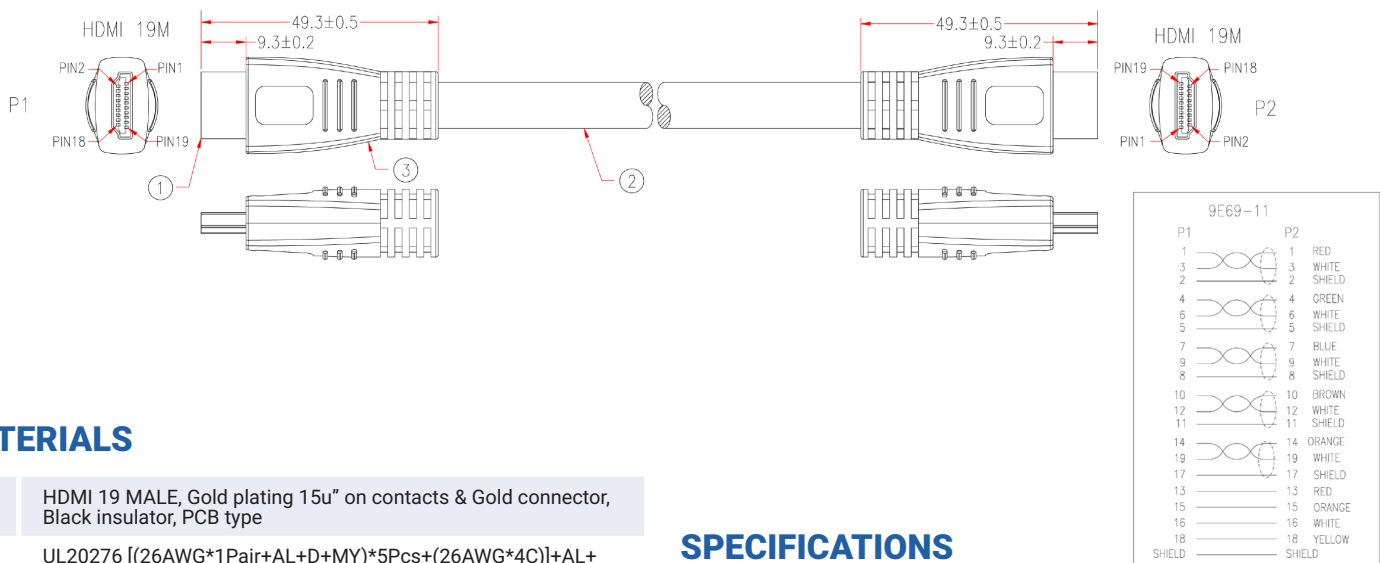

## MATERIALS

(1)	HDMI 19 MALE, Gold plating 15u" on contacts & Gold connector, Black insulator, PCB type
(2)	UL20276 [(26AWG*1Pair+AL+D+MY)*5Pcs+(26AWG*4C)]+AL+AMA BRAID(16/11/0.12mm), OD 8.5mm, HDMI 1.4, Jacket Black, (Flame Rating: CL2) H0141333
(3)	Molded PVC Black
	Molded PE Colour Transparent
	Copper Foil 15*60mm
	Black Heat Shrink Tube $\phi$ 2.5*4mm
	Black Heat Shrink Tube $\phi$ 0.8*5mm
	Black Heat Shrink Tube $\phi$ 2.0*5mm

## SPECIFICATIONS

CABLE LENGTH UNLESS OTHER SPEC.		
TOLERANCES:		
0 - 200mm		±10mm
201 - 1000mm		±20mm
1001 - 1500mm		±25mm
1501 - 2100 mm		±30mm
2100 mm -		±40mm

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.