

HDMI 1.4 TO MICRO HDMI M/M CABLE


SKUS

VC-674A	(1')	VC-674L	(10')
VC-674S	(3')	VC-674E	(15')
VC-674G	(6')		

AVAILABLE COLOUR

FEATURES

- HDMI 1.4 Type A Male to Type D Male High Speed with Ethernet Cable
- Use to connect your GoPro, camera, camcorder, or other Micro HDMI-equipped devices to a TV or projector with an HDMI port
- Support HDMI 1.4 functions including HDMI Ethernet channel, 3D video, 4K resolution, audio return channel, deeper color
- Support resolution up to 4K@60Hz
- Feature a high-speed data transfer rate up to 100 Mb/sec
- Gold-plated connectors for superior transmission, high reliability and durability

SPECIFICATIONS


ROHS COMPLIANT CABLE LENGTH UNLESS OTHER SPEC. TOLERANCES:	
0 - 200mm	±10mm
201 - 1000mm	±20mm
1001 - 1500mm	±25mm
1501 - 2100 mm	±30mm
2100 mm -	±40mm

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com

HDMI 1.4 TO MICRO HDMI M/M CABLE

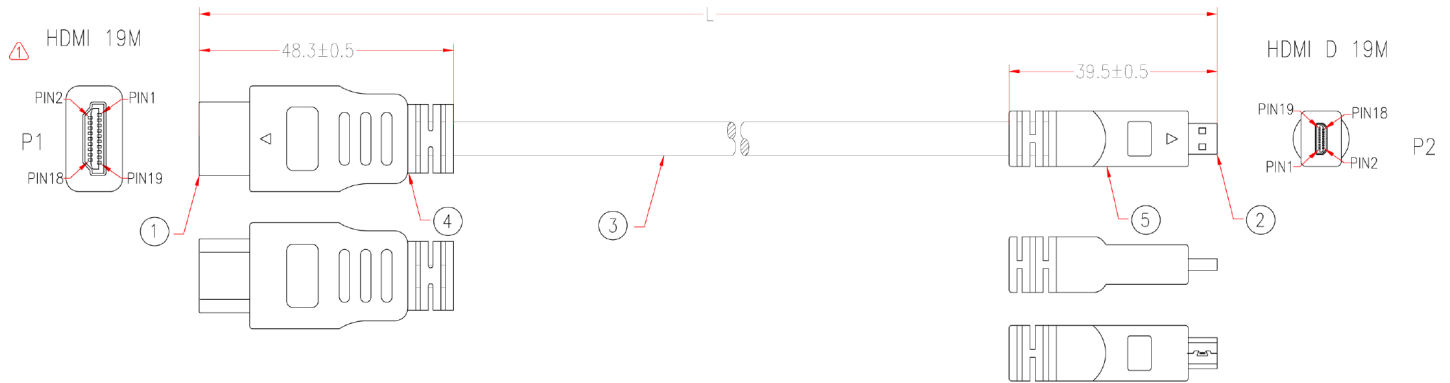

9135-1			
P1	P2	P1	P2
1	3	13	15
3	5	15	17
2	4	16	18
4	6	18	19
6	8	SHIELD	SHIELD
5	7		
7	9		
8	11		
9	10		
10	12		
12	14		
11	13		
14	2		
19	1		
17	16		

MATERIALS

(1)	HDMI 19 MALE 34AWG, Gold Plating 15u" on Contacts & Gold Connector, Black Insulator		Molded PVC Black
(2)	HDMI 19 D MALE, Gold Plating 15u" on Contact & Gold Connector, Black Insulator		Molded PE Colour Transparent
(3)	UL20276 [(34AWG*1P+D+FAM)*5Pcs+34AWG*4C] +AEB HDMI 1.4, OD 5.0mm, Jacket Black	(5)	Molded PP Colour Transparent
	Molded PVC Black		Copper Foil 17*50mm
	Molded PE Colour Transparent		Black Heat Shrink Tube ø0.8*5mm
	Molded PP Colour Transparent		Black Heat Shrink Tube ø2.5*4mm
(4)	Copper Foil 33*60mm		
	Black Heat Shrink Tube ø0.8*5mm		
	Black Heat Shrink Tube ø2.5*4mm		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.