

# HDMI FEMALE TO MINI HDMI MALE CABLE (8")


**SKUS** VC-655A

## FEATURES

- HDMI Type A Female To HDMI Type D (Micro) Male High Speed with Ethernet Cable 8" 30 AWG
- Use as a port saver when connecting a device with a Micro-HDMI port to a television or computer monitor using a male HDMI cable
- 4K x 2K (3840x2160p at 24Hz/25Hz/30Hz and 4096x2160p at 24Hz)
- Gold-plated pure copper conductors for maximum conductivity and bandwidth
- HDMI Ethernet Channel, which allows for a 100 Mb/s Ethernet connection
- All material RoHS compliant



## AVAILABLE COLOUR

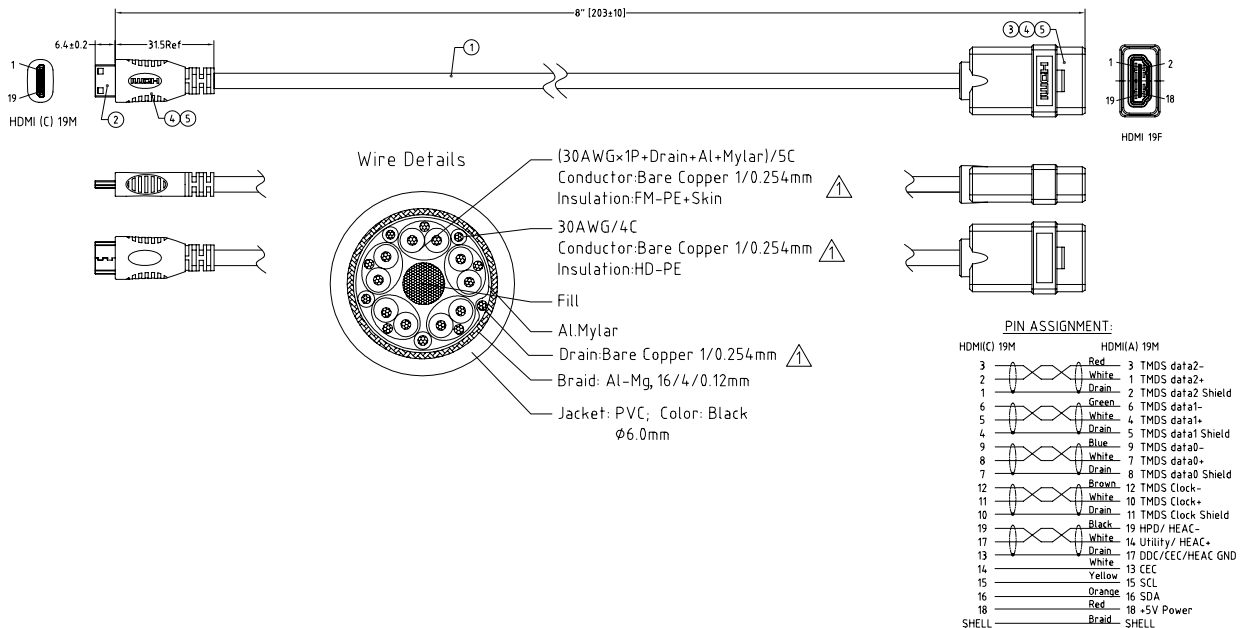

## MATERIALS

<b>(1) CABLE</b>	UL20276 (30#BC/1P+ADM)/5C+30#B-C/4C+F+A+D+B(16/4/0.12, Al-Mg)+PVC, Black, OD 6.0mm
<b>(2) HDMI CONN.</b>	HDMI A/M, Pin G/F, Black Insulation, Steel-Shell(G/F Plated), Solder type
<b>(3) HDMI CONN.</b>	HDMI C/M, Pin G/F, Black Insulation, Shell(G/F Plated), Solder type
<b>(4) INNER MOLD</b>	PE, Low density
<b>(5) OVER MOLD</b>	PVC 45Pa, BLACK

## SPECIFICATIONS

**ROHS COMPLIANT | 100% TESTED (OPEN, SHORT, INTERMITTENT)**

**CONDUCTANCE RESISTANCE** 3 ohms (max.)

**INSULATION RESISTANCE** 10M ohms (min.), DC 300V at 10/ms.

**RESIDUAL OPERATING CURRENT**

a. <1.1M=0.5mA;	b. 1.0~2.0M=1.0mA;
c. 2.0~3.0M=2.0mA;	d. 3.0~5.0M=3.0mA;
e. 5.0~10M=5.0mA;	f. 10~15M=7.0mA;

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

[www.pccableworld.com](http://www.pccableworld.com)