

RJ45 CAT6 PCB TYPE SURFACE-MOUNT BOX (TOOL-LESS)

SKUS C6-069W

FEATURES

- 1-Port White Surface Mount Box with pre-loaded Tool-Less RJ45 Cat6 Keystone Jack for mounting wire termination completed on the external side of a wall
- Save time and money with pre-loaded, non interchangeable black Cat6 keystone jack with colour coded T568A and T568B wiring patterns
- For use with 22-26 AWG Cat6 cable
- Use with 110 punch-down tool or IDC cap for tool-less terminations
- Easy open and close snap cover for accessing keystone jack
- Includes a variety of mounting options for easy installation: screws for wall-mounting or padded dual sided tape for mounting on hard surfaces




AVAILABLE COLOURS



SIZE (WxDxH) 39 x 52 x 25.5 mm

MATERIALS

BODY	Fireproof ABS UL-94V0
JACK	8P8C 50 Micro-inches gold plated
PCB	FR-4 / UL-94V0
IDC CAP	Fireproof PC + Glass Fiber UL-94V2
IDC BODY	Fireproof ABS UL-94V0
IDC PIN	Phosphor Bronze & Tinned
IDC DESCRIPTION	For 22-26 AWG For 110 punch-down Tool Tool-less (when use IDC cap directly)

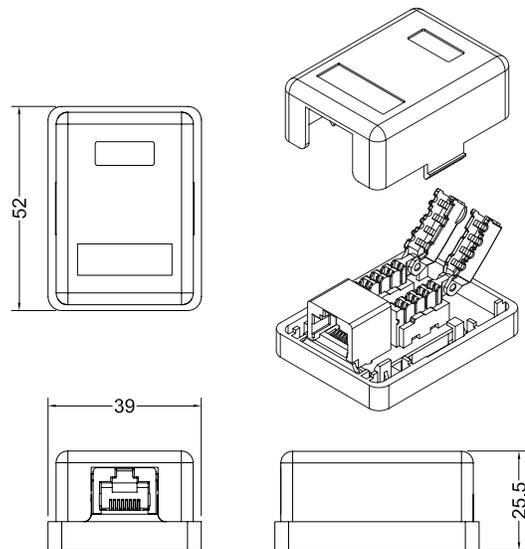

SPECIFICATIONS

UL APPROVED 3P THIRD PARTY TESTED ROHS COMPLIANT	INSULATION RESISTANCE	500M ohms (min.)	
MEETS C6 EIA/TIA 568A/B STANDARD CETLUS CERTIFIED	CONTACT RESISTANCE	20m ohms (max.)	
IDC PUNCH DOWN CYCLE	Over 250 Cycles (min.)	CURRENT RATING	1.5 Amps
JACK INSERTION CYCLE	Over 2000 Cycles (min.)	DC RESISTANCE	0.1 ohms (max.)
OPERATION TEMPERATURE	-40 — +70 Degrees Celsius	WITHSTANDING VOLTAGE	1000 VAC RMS @ 60Hz/1min
TOLERANCE	X ± 1 .X ± 0.2 .XX ± 0.15		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com