

RJ12 CAT3 SLIM KEYSTONE JACK (TOOL-LESS)

SKUS SJ-646D (Black)
SJ-646W (White)

FEATURES





- Category 3 RJ12 UTP Slim Keystone (6P6C) 16.6 x 31.5 x 22.3 mm
- Use for voice and communications applications
- Compatible with RJ11 or RJ12 modular phone cables
- No tool required, can terminate with IDC cap or 110 punch-down tool
- Snap in for use with standard sized wall plates, surface-mount boxes, or unloaded patch panels
- 90° wire connection
- 6 micro-inch gold plated contacts for superior transmission, high reliability and durability
- PCB technology provides maximum performance and superior signal quality
- Labelled with color-coded wiring diagram
- Fireproof ABS UL-94V0 body
- 3P Third Party Tested, meets or exceeds C3 EIA/TIA standards, ETL Intertek listed



AVAILABLE COLOURS



SIZE (WxDxH) 16.6 x 36.5 x 22.3 mm

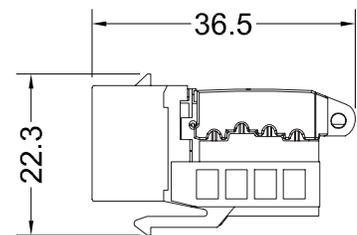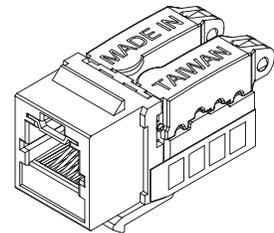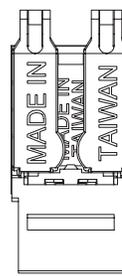

MATERIALS

BODY	Fireproof ABS UL-94V0
JACK	6P6C 6 Micro-inches gold plated
PCB	FR-4 / UL-94V0
IDC CAP	Fireproof PC+Glass Fiber UL-94V2
IDC BODY	Fireproof ABS UL-94V0
IDC PIN	Phosphor Bronze & Tinned
IDC DESCRIPTION	For 22-26 AWG For 110 punch-down Tool Tool-less (when use IDC cap directly)

SPECIFICATIONS

UL APPROVED 3P THIRD PARTY TESTED ROHS COMPLIANT	INSULATION RESISTANCE	500M ohms (min.)	
MEETS CAT3 STANDARD CETLUS CERTIFIED	CONTACT RESISTANCE	20m ohms (max.)	
IDC PUNCH DOWN CYCLE	Over 250 Cycles (min.)	CURRENT RATING	1.5 Amps
JACK INSERTION CYCLE	Over 2000 Cycles (min.)	DC RESISTANCE	0.1 ohms (max.)
OPERATION TEMPERATURE	-40 – +70 Degrees Celsius	WITHSTANDING VOLTAGE	1000 VAC RMS @ 60Hz/1min
TOLERANCE	X ± 1 .X ± 0.2 .XX ± 0.15		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com