

USB 2.0 A/A M/M CABLE



SKUS	US-2AA1	(1.5')	US-2AA10	(10')
	US-2AA3	(3')	US-2AA15	(15')
	US-2AA6	(6')		

FEATURES

- USB 2.0 Type A Male to Male Data Cable
- Use to connect a host device such as a CPU and a USB-A peripheral device
- Supports Hi-Speed USB 2.0 devices (480 Mbps)
- 30 micron gold plating on phosphor bronze contacts for superior transmission, high reliability and durability
- Universal Plug and Play System, no driver required
- Color coded twisted pair construction aids in reducing cross-talk allowing high-speed, error-free data transfer
- Aluminum braid shielding and a drain wire offers protection against Electromagnetic Interference/Radio Frequency Interference (EMI/RFI)
- Backwards compatible with Full-Speed USB 1.1
- In-wall CMG/FT4 rated



PIN ASSIGNMENT:

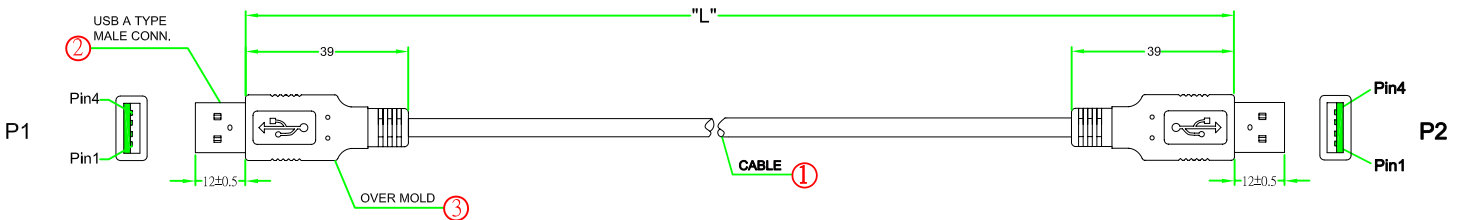

MATERIALS

(1) CABLE	28AWG(7/ 0.127T)*1P + 24AWG(7/0.20T)*2C + AB65% OD: 4.5mm, JACKET: BLACK, CMG/FT4
(2) USB A TYPE MALE CONN.	Back Shell: Steel, Gold Plated Front Shell: Steel Gold Plated Insulator: PBT, White Colour Contact: Phosphor Bronze, Gold Plated 30u", Solder type
(3) OVER MOLD	PVC 45P Colour: Black

SPECIFICATIONS

TOLERANCE	X.X ± 0.20 XX.X ± 0.50 XXX.X ± 1.0
CONDUCTANCE RESISTANCE	5 ohms (max.)
INSULATION RESISTANCE	10M ohms (min.)/300V DC 10/ms.
US-2AA1	1.5' (457mm±20mm)
US-2AA3	3' (914mm±30mm)
US-2AA6	6' (1829mm±30mm)
US-2AA10	10' (3048mm±30mm)
US-2AA15	15' (4572mm±50mm)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.