

MAINFRAME ADJUSTABLE DUAL SWING RELAY RACK SERIES

ADS-RR SERIES

MAINFRAME Adjustable Dual-Swing Series (ADS-RR) provides a time-saving, rotating interface, perfect for accessing your equipment. With adjustable depth (18~26") you can be certain that your hardware will fit securely while being conveniently accessible.

INTRODUCING FEATURES

Accepts standard 19" rackmount equipment

Pre-tapped 12-24 mounting rails come with:

- 12 x M6 Assembly Screws and Nuts
- 12 x 12-24 Screws and Nuts (6/9/12U)
- 24 x 12-24 Screws and Nuts (15/18U)
- 4 x Concrete Anchor Bolts

Easy installation with accessible design



Attractive powder-coated finish


SPCC cold rolled steel construction

Static load: 45kg (99lbs)



Swing-out mounting rails

These 19" mounting rails can be swung-out, providing easy access to install or upgrade equipment.

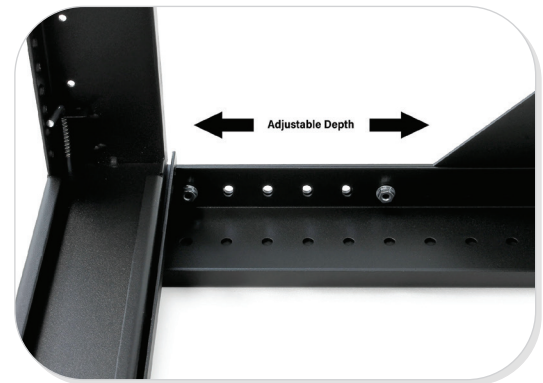

Adjustable depth

Depth is adjustable from 18~26".

MAINFRAME ADJUSTABLE DUAL SWING RELAY RACK SERIES

ADS-RR SERIES



ADS-RR-6U


ADS-RR-9U

ADS-RR-12U


ADS-RR-15U

ADS-RR-18U


MAIN DIMENSIONS



Top View



Side View



Front View

SPECIFICATIONS

MODEL	SIZE	DIMENSIONS W x D x H (mm)	DIMENSIONS W x D x H (in)	LOAD CAPACITY
ADS-RR-6U	6U	524 x 461~664 x 387.70	20.63 x 18.15~26.14 x 15.26	45kg (99lbs)
ADS-RR-9U	9U	524 x 461~664 x 521.05	20.63 x 18.15~26.14 x 20.51	45kg (99lbs)
ADS-RR-12U	12U	524 x 461~664 x 654.40	20.63 x 18.15~26.14 x 25.76	45kg (99lbs)
ADS-RR-15U	15U	524 x 461~664 x 787.75	20.63 x 18.15~26.14 x 31.01	45kg (99lbs)
ADS-RR-18U	18U	524 x 461~664 x 921.10	20.63 x 18.15~26.14 x 36.26	45kg (99lbs)

MAINFRAME provides a 3-year warranty.