


DB25 F/F SLIM GENDER CHANGER


SKUS GC-706S

FEATURES

- DB25 F/F Slim Gender Changer 53.3 x 12.6mm
- Used to convert a DB25 M port to DB25 F
- Otherwise known as D-sub 25
- Comes with pre-installed #4-40 UNC hex screws
- Low-profile slim design
- Features gold plated contacts, for high transmission, reliability, and durability
- Allows asynchronous data transmission according to the RS-232 standard
- For serial and parallel connections
- RoHS compliant

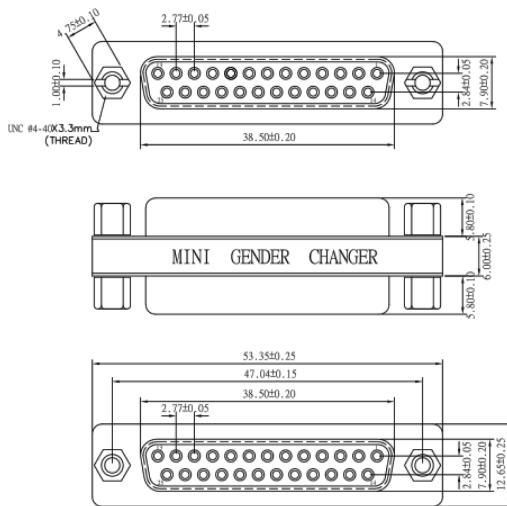


UNC #4-40 Hexscrew



UNC #4-40 Hexnut



DGC 25 F/F GENDER CHANGER
PIN OUT: 25Female

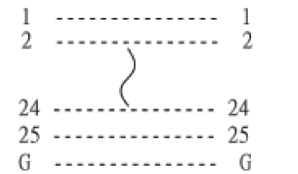

SPECIFICATIONS

| ROHS COMPLIANT | |
|------------------------|---|
| LABEL | Yellow colour with black character One side: MINI GENDER CHANGER The other side: U.S.A. PATENT 5199906 GENDER CHANGER |
| INSULATOR | PBT Glass fibre reinforced UL 94 V0 |
| CONTACT | Brass |
| CONTACT PLATING | Gold plated over nickel |
| SHELL | Tin plated shell |
| TOLERANCE | .X ± 0.20 .XX ± 0.15 .XXX ± 0.05 |

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com