


**Features: DIGI-66 Professional Network Multi-Room Controller Amplifier**

- Distribute 6 stereo audio signals to 6 rooms simultaneously
- Cascade-able for larger systems up to 18 zones (X-66-AMP-NS)
- Includes 6 x Internal Wi-Fi streamers, Play 6 different sources in 6 rooms simultaneously
- Stream music from your tablet or smart phone or use all the most popular streaming services.**
- Includes internet radio with 1000's of stations in every music genera**
- Direct Ethernet connection for complete Wi-Fi control from phones and tablets
- Any source to any room simultaneously
- Bi-directional RS232 control of all functions
- Easy integration with master control systems
- Six stereo analog audio inputs
- Six digital SPDIF optical audio inputs
- Six stereo pre-amp outputs
- Six discrete Infrared output ports / one master Infrared output port
- Seven 12V trigger outputs
- Master mute 12V trigger input
- Switchable AGC automatic source gain control leveler
- All zones (play source one) 12V trigger input (party mode or paging)
- Free Control 4 and Compass Control Drivers available

*6 Internal Wi-Fi Streamers  
and 18 inputs with single  
app control!*

- Kit includes:
- 1 x DIGI-66 master controller amplifier with 6 x Digistream-1 Wi-Fi streamers
  - 1 x 2U Rack mounting kit
  - 3 Year Warranty

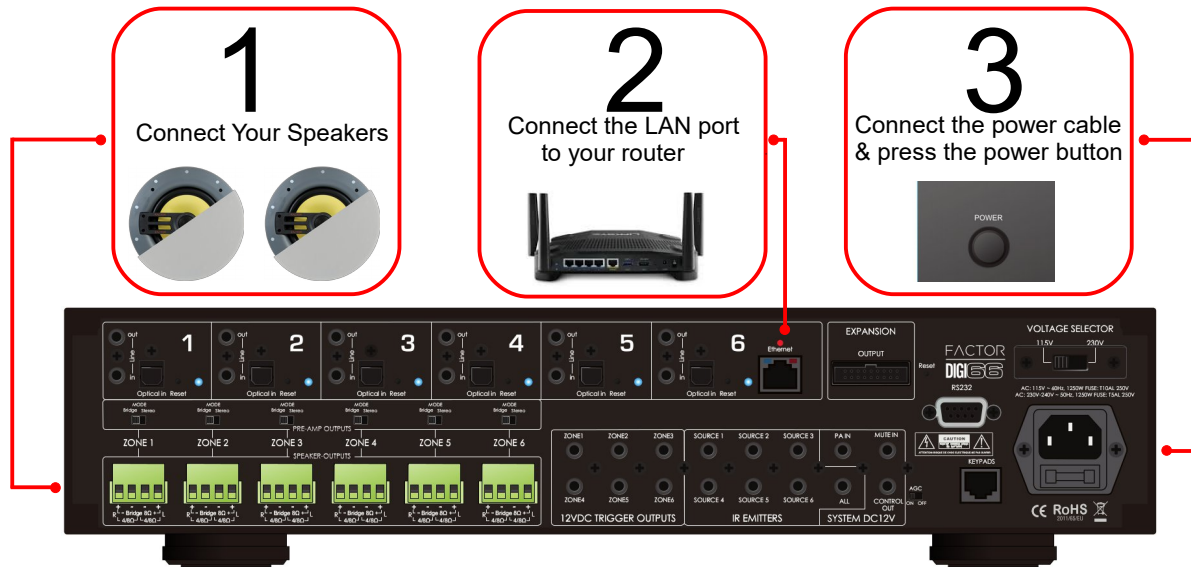

Installation is so easy!

Available Drivers

Control



All logos are the property of their respective owners

**4**  
Download the App

Download on iTunes

GET IT ON Google Play

Open the App & Play

### Specifications:

RMS Power @ 8ohms 25 watts x 12  
 RMS Power @ 4ohms 50 watts x 12  
 RMS Power @ 8ohms 100 watts x 6 (bridge mode)  
 S/N Ratio >85dB A Weighted  
 THD <0.1%  
 Frequency Response 20Hz-20kHz  
 Input Impedance >47Kohms  
 Input Sensitivity 250mv  
 Amplifier Protection Overload, short circuit & thermal  
 Trigger System on DC + 12V  
 Trigger External Mute DC + 12V  
 Infrared Frequency 38kHz  
 6 Internal Wi-Fi streamers  
 6 SPDIF optical inputs, 6 stereo analog inputs, 6 stereo analog outputs  
 Input Connectors 3.5mm stereo, Digital SPDIF Optical  
 Output Connectors Terminal Block & 3.5mm stereo  
 Power Supply AC115V/60Hz or 230V/50Hz switchable  
**DIGI-66 Ethernet:** 10/100Mbps RJ45 Connector  
 Digistream-1 x 6 Ethernet paralleled  
 Digistream-1 DAC 24bit 192KHz  
 Digistream-1 file support FLAC, WAV, AAC-LC, HE-AC, MP3, WMA

### Power Consumption:

Power Supply AC115V/60Hz or 230V/50Hz  
 Power consumption 1250 watts

### Dimensions:

W- 19"/482.6mm w/rack kit  
 W- 17"/430mm no/rack kit  
 H - 3.5"/89mm / D - 16.4"/416mm  
**Shipping Weight 25lbs (11kg)**

### Optional Keypad Kits Available

X-66-WKP-KIT

X-66-BKP-KIT

