


Features:

- High Speed audio extender over a single Cat5/6
- Perfect for sending TV audio to an amplifier
- PoC system requires only one power supply at RX
- Extend digital and analog audio up to 900' (300m)
- Up to 24 bit resolution 192KHz, 96KHz, 48KHz, 32KHz
- Digital multi channel to stereo analog converter
- Supports, LPCM, DTS, Dolby & Dolby Plus
- Ultra low jitter with high fidelity
- Uses one Cat5e/6 IEEE-568B/or 568A termination
- Terminate connections with standard RJ45 jacks

Kit includes:

- 1 x Tx Balun
- 1 x Rx Balun
- 1 x 5VDC 1A power supply
- Wall mount brackets
- Tough steel cases

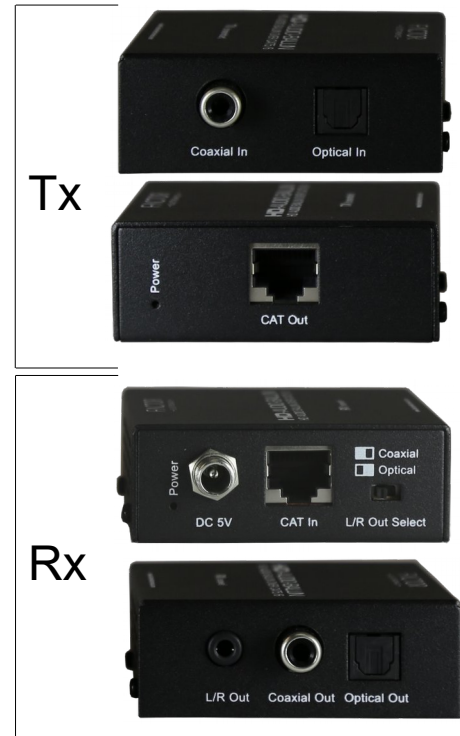

Specifications:

- Max Cat5/6 cable distance: 300m (48KHz), 150m (96KHz), 100m (192KHz)
- Supported formats: LPCM, DTS, Dolby Digital-Dolby Digital Plus
- Cat5/6 termination – IEEE568B/568A
- Inputs TX: 1 x Optical Toslink, 1 x Coaxial SPDIF RCA
- Outputs RX: 1 x Optical Toslink, 1 x Coaxial SPDIF RCA-1 x Analog Stereo 3.5mm

Includes:

- 1 x TX Balun
- 1 x RX Balun
- 1 x Power Supply – 5Vdc 1A (UL,CE,FCC)

Dimensions:

- Width- 2.7"/69mm
- Height – 0.9"/24mm
- Depth - 2.5"/64mm
- Shipping Weight 1.76 lbs (0.8kg)



Extend TV audio to the X-66, Digi-66 or any Amplifier

