


CAT6 GREY UTP NETWORK PATCH CABLE (10/PACK)

SKUS	C6-005	(0.5')	C6-04	(4')
	C6-001	(1')	C6-05	(5')
	C6-01	(1.5')	C6-06	(6')
	C6-02	(2')	C6-07	(7')
	C6-03	(3')	C6-010	(10')

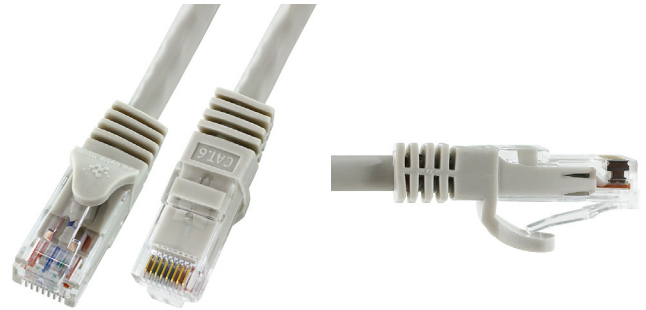


FEATURES

- Category 6 4-pair UTP 24AWG stranded copper network cable
- Use for voice, data, video distribution, and security applications
- Improved attenuation provides cleaner data and video transmissions compared to previous Cat5E standards
- Molded, snag-less boot prevents unwanted cable snags during installation and provides extra strain relief
- Ethernet 1000 BASE-T; 100 BASE-T; 10 BASE-T (IEEE 802.3)
- Meets and/or Exceeds EIA/TIA 568 C.2-1
- 50 micron gold-plated RJ45 8P8C modular connector PVC Jacket
- UL CM & CSA CMG Certification
- FT4 rating for in-wall use
- Tested for applications up to 550Mhz

AVAILABLE COLOUR

Pin Assignment:

Pos. No.	T568B WIRING (PC TO HUB)	Pos. No.
1	Orange	1
2	White/Orange	2
3	Green	3
6	White/Green	6
4	White/Blue	4
5	Blue	5
7	Brown	7
8	White/Brown	8
Shell	Drain Wire	Shell

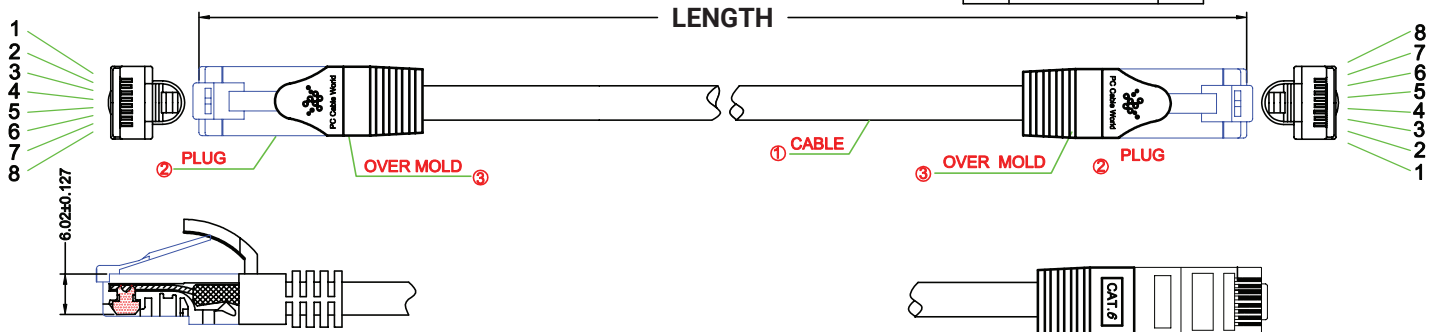

MATERIALS

CABLE (1)	Cat6 UTP 24AWG(7/0.20)*4 pairs LAN stranded cable
JACKET	PVC (OD 6.0 ± 0.1 mm)
PLUG (2)	RJ-45 8P8C Modular short shielded plug Contact: Copper alloy 50 Micro-inches, gold plated Insulator: Polycarbonate, UL94V-2
OVER MOLD (3)	PVC, 75P. Colour: Grey

SPECIFICATIONS

MEETS C6 EIA/TIA 568 C.2-1 ROHS COMPLIANT			
SKUS	LENGTH	SKUS	LENGTH
C6-001	1' (305mm±20mm)	C6-05	5' (1524mm±30mm)
C6-01	1.5' (457mm±20mm)	C6-06	6' (1829mm±30mm)
C6-02	2' (610mm±20mm)	C6-07	7' (2134mm±30mm)
C6-03	3' (914mm±20mm)	C6-010	10' (3048mm±50mm)
C6-04	4' (1219mm±30mm)		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.