



# SC-SC/APC SM SIMPLEX 9/125 FIBER OPTICAL CABLE

SKUS	SCSCA03SS (3')	SCSCA33SS (33')
	SCSCA06SS (6')	SCSCA50SS (50')
	SCSCA10SS (10')	SCSCA65SS (65')
	SCSCA15SS (15')	SCSCA75SS (75')
	SCSCA25SS (25')	SCSCA100SS (100')

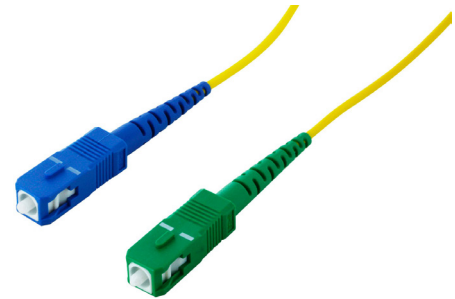

## FEATURES

- SC/UPC-SC/APC OS2 Single-Mode Simplex Cable 9/125µm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications.
- Ideal solution for long-range networking.
- UL listed and OFNR (riser) rated.
- Suitable for use in upright shafts between building floors.
- Compliant with ITU-T standard G657A1.
- Features a standard SMF yellow jacket and Corning core.
- Each cable is individually packed in a zip bag for convenience.

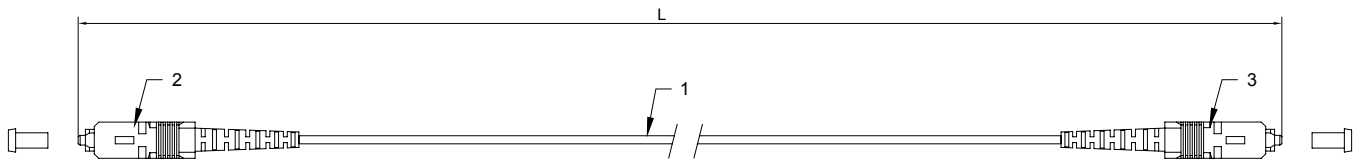

## MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Simplex Cable, PVC, <b>Colour:</b> Yellow
(2)	SC/UPC SM 2.0mm Simplex Connector (Blue Housing Blue Boot)
(3)	SC/APC SM 2.0mm Simplex Connector (Green Housing Green Boot)

## CABLE LENGTH AND TOLERANCE

<b>CABLE LENGTH&lt;1M</b>	5cm
<b>1M≤CABLE LENGTH&lt;15M</b>	10cm
<b>15M≤CABLE LENGTH&lt;30M</b>	15cm
<b>CABLE LENGTH≥30M</b>	Cable Length*1%

## SPECIFICATIONS

<b>INSERTION LOSS</b>	≤ 0.3 dB
<b>RETURN LOSS</b>	≥ 60 dB (APC), ≥ 55 dB (UPC)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

[www.pccableworld.com](http://www.pccableworld.com)