# **INSTRUCTION SHEET**

CMS-BS

#### MAINFRAME BRUSH STRIP CABLE MANAGEMENT PANEL FOR WALL MOUNT CABINET

### **Package Contents:**



Brush Strip Cable Manacament Panel \* 1pc

#### **Tools Required:**

Phillips screwdriver (not included)



M4-0.7 Phillips Head Self Tapping Screw \* **2pcs** 

### Compatible with:

- MAINFRAME H-CAB series
- MAINFRAME F-CAB series





Use a screwdriver to remove the cable access panel(s) located at the top of your Wall Mount Cabinet.

\* H-CAB has two cable access panels

\* F-CAB has one cable access panel





## **INSTRUCTION SHEET**

CMS-BS

MAINFRAME BRUSH STRIP CABLE MANAGEMENT PANEL FOR WALL MOUNT CABINET






To install the panel, place it on the outer side of the cabinet with the brush side facing inward. There is an option to face the panel on either side, and the brush part can be positioned inward or outward based on your preference for cable management.

Once done, align the panel with the pre-cut slot. Make sure that the mounting holes on the panel are aligned with the corresponding holes on the cabinet.



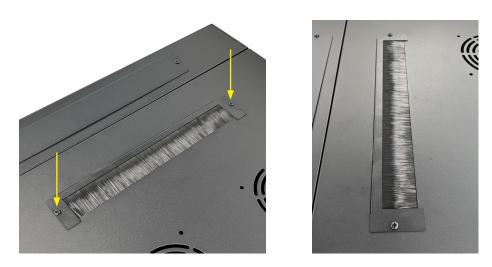

To fasten the Brush Strip Cable Management Panel to the cabinet, please use the mounting hardware provided. Insert the screws through the mounting holes and use a Phillips screwdriver to tighten them without over-tightening which could cause damage to the panel or the cabinet.

Once the installation is complete, inspect the panel to ensure it is securely fastened and flush with the cabinet surface. Make sure that the brush strip allows the cables to pass through while minimizing any gaps to deter dust.