


INSTALLATION


3

Install the RIGHT parts and castors.

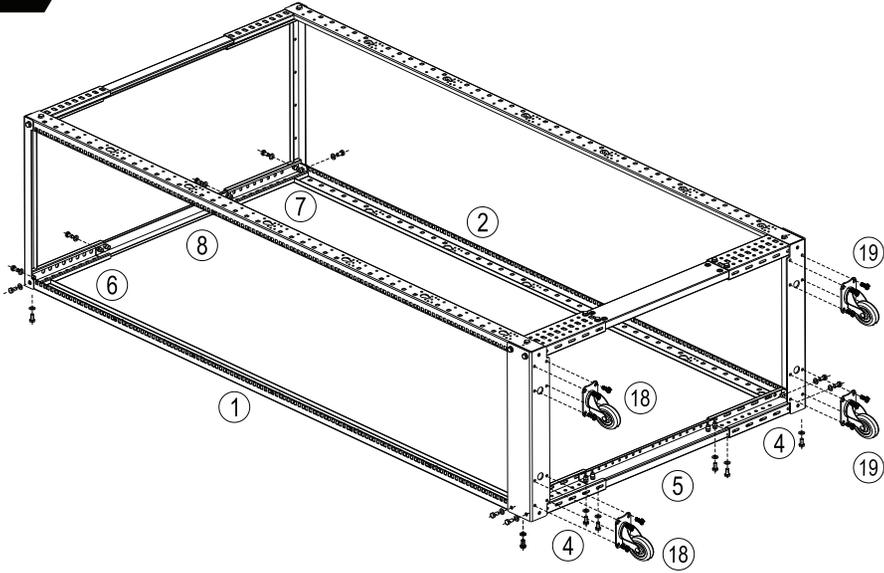

4


Install the cable management hooks.

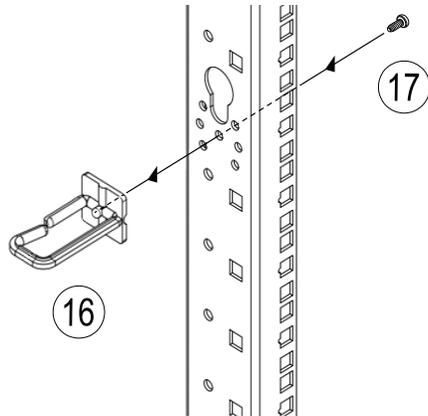

OF-42U-ES


ASSEMBLY INSTRUCTION

V. 1.3

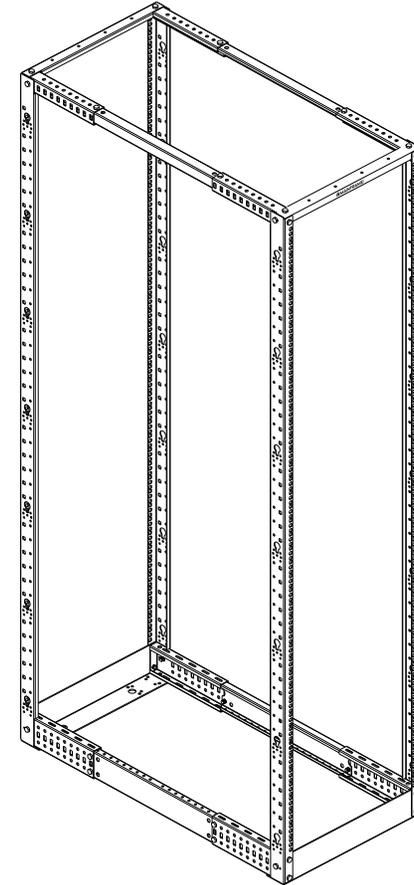

ITEM LIST


Check the quantities of the items before assembly.

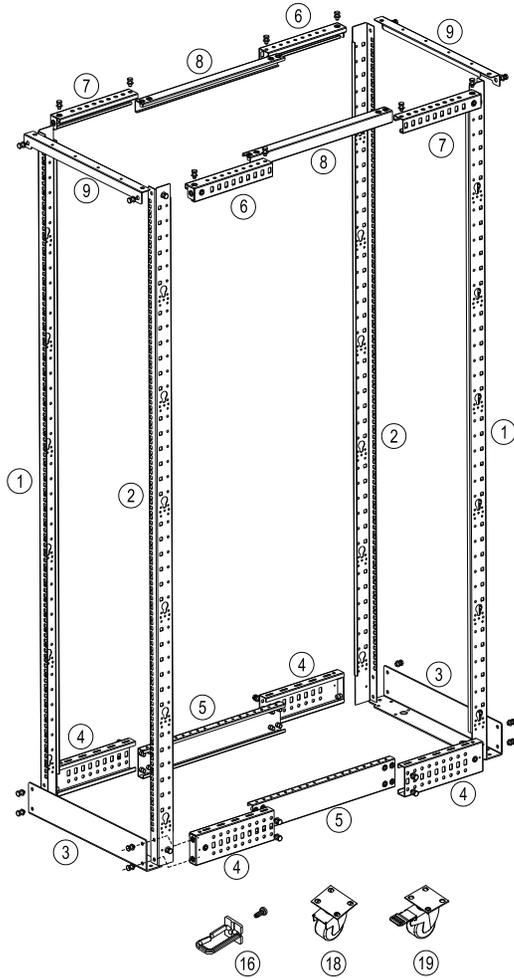

S/N	NAME	Qty
Rack Components		
1	LEFT Vertical Rail	2
2	RIGHT Vertical Rail	2
3	Base Bracket	2
4	Bottom Corner Section	4
5	Bottom Center Section	2
6	Top Left Corner Section	2
7	Top Right Corner Section	2
8	Top Center Section	2
9	Top Bracket	2
Rack Assembly Hardware		
10	M8 Bolt	36
11	M8 Washer	36
Rack Assembly Tool		
12	M8(13mm) Wrench	1
Equipment Mounting Hardware		
13	M6 Cage Nut	40
14	PVC Cup Washer	40
15	M6-12 Phillips-Head Screw	40
Cable Management Hardware		
16	Cable Management HOOK	24
17	HOOK Mounting Screw	24
Castor Assembly Hardware		
18	Castor	2
19	Castor w/ Brake	2
20	M6-12 Screw	16
21	M6 Flange Nut	16

INSTALLATION

1 Install the beams.

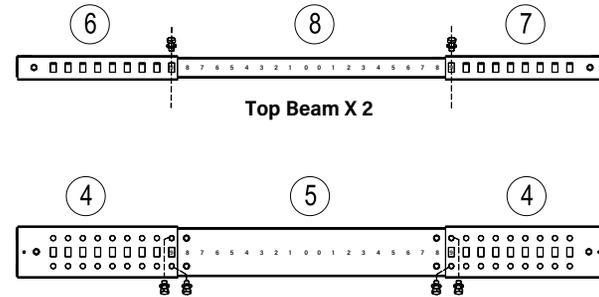

Rack Adjustable Depth Index Numbers	
Mounting Depth	Index Numbers
22 in.	0 and 0
23 in.	0 and 1
24 in.	1 and 1
25 in.	1 and 2
26 in.	2 and 2
27 in.	2 and 3
28 in.	3 and 3
29 in.	3 and 4
30 in.	4 and 4
31 in.	4 and 5
32 in.	5 and 5
33 in.	5 and 5
34 in.	6 and 6
35 in.	6 and 7
36 in.	7 and 7
37 in.	7 and 8
38 in.	8 and 8
39 in.	8 and 9
40 in.	9 and 9

Note: By adjusting the beams to match the corresponding numbers marked on them, you can set the depth anywhere from 22 to 40 inches, in 1-inch increments. Please note, the actual product does not have the number 9 marked on it.

2 Install the LEFT parts.

