

1. Package Contents

Thank you for purchasing PLANET 16-/24-Port 10/100/1000BASE-T Unmanaged Gigabit Ethernet Switch, GSW-1601/GSW-2401. "Gigabit Ethernet Switch" mentioned in this User's Manual refers to the GSW-1601/GSW-2401.

Open the box of the Gigabit Ethernet Switch and carefully unpack it. The box should contain the following items:

Gigabit Ethernet Switch x 1

Power Cord x 1



Accessories x 1

User's Manual x 1



If any of these are missing or damaged, please contact your dealer immediately; if possible, retain the carton including the original packing material, and use them again to repack the product in case there is a need to return it to us for repair.

- 1 -

Hardware Features

- 100~240V AC, 0.3A, 50~60Hz universal power input (GSW-1601)
- 100~240V AC, 0.6A, 50~60Hz universal power input (GSW-2401)
- FCC, CE class A compliant

3. Product Specifications

Product	GSW-1601	GSW-2401
Hardware Specifications		
Hardware Version	7	
10/100/1000BASE-T MDI/MDIX Ports	16	24
Throughput (packet per second)	23.8Mpps	35.7Mpps
Switch Fabric	32Gbps	48Gbps
Weight	1.8kg	1.9kg
Power Consumption/Dissipation	8.9 watts/30 BTU	13.5 watts/46 BTU

- 3 -

4. Switch Front Panel

Figures 1 & 2 show the front panels of the GSW-1601 and GSW-2401.



Figure 1: GSW-1601 Front Panel



Figure 2: GSW-2401 Front Panel

- 5 -

5. Switch Rear Panel

Figures 3 & 4 show the rear panels of the GSW-1601 and GSW-2401.



Figure 3: GSW-1601 Rear Panel



Figure 4: GSW-2401 Rear Panel

- 7 -

2. Product Features

Physical Port

- 16/24 10/100/1000BASE-T Gigabit Ethernet ports
- Supports auto MDI/MDI-X function

Layer 2 Features

- Complies with IEEE 802.3, 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T Ethernet standards
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- Integrated address look-up engine, supporting 8K absolute MAC addresses
- 10K Jumbo packet support
- Power Saving ability for Green networking
- IEEE 802.1Q VLAN packet transparency support
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- Hardware based 10/100BASE-TX, half/full duplex and 1000BASE-T full duplex mode, flow control and auto-negotiation
- Automatic address learning and address aging
- Supports CSMA/CD protocol

- 2 -

Power Requirements	100~240V AC, 0.3A, 50-60Hz	100~240V AC, 0.6A, 50-60Hz
Dimensions (W x D x H)	440 x 180 x 44mm, 1U height	
Switch Processing Scheme	Store-and-Forward	
Address Table	8K entries	
Jumbo Packet Size	10K	
Flow Control	Back pressure for half duplex, IEEE 802.3x Pause Frame for full duplex	
Temperature	Operating: 0~50 degree C Storage: -10~70 degree C	
Humidity	Operating: 5% to 95% (non-condensing) Storage: 5% to 95% (non-condensing)	
Standards Conformance		
Regulatory Compliance	FCC Part 15 Class A, CE	
Standards Compliance	IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) IEEE 802.3x (Full-Duplex Flow Control)	

- 4 -

LED Indicators

GSW-1601/GSW-2401

System

LED	Color	Function
PWR	Green	Lights to indicate that the Switch has power.

Per 10/100/1000BASE-T Port

LED	Color	Function
LNK/ACT	Green	Lights to indicate the link through that port is established successfully. Blinks to indicate that the Switch is actively sending or receiving data over that port.
1000	Green	Lights to indicate the port is running at 1000Mbps. When off, it indicates that the port is operating at 10/100Mbps.

- 6 -

6. Installing the Switch

This part describes how to install your Gigabit Ethernet Switch and make connections to it. Please follow the procedure below:

 Note: This Gigabit Ethernet Switch does not need software configuration.

Desktop Installation

To install the Gigabit Ethernet Switch on the desktop, simply follow these steps:

- Step 1:** Attach the rubber feet to the recessed areas on the bottom of the Gigabit Ethernet Switch.
- Step 2:** Place the Gigabit Ethernet Switch on the desktop near an AC power source.
- Step 3:** Keep enough ventilation space between the Gigabit Ethernet Switch and the surrounding objects.

 Note: When choosing a location, please keep in mind the environmental restrictions discussed in Section 3 under Product Specifications.

- 8 -

Step 4: Connect your Gigabit Ethernet Switch to network devices.

- A.** Connect one end of a standard network cable to the 10/100/1000BASE-T RJ45 ports on the front of the Gigabit Ethernet Switch.
- B.** Connect the other end of the cable to the network devices such as printer servers, workstations or routers, etc.

Step 5: Supply power to the Gigabit Ethernet Switch.

- A.** Connect one end of the power cable to the Gigabit Ethernet Switch.
- B.** Connect the power plug of the power cable to a standard wall outlet.

When the Gigabit Ethernet Switch receives power, the Power LED should remain solid Green.

Rack Mounting

To install the Gigabit Ethernet Switch in a 19-inch standard rack, follow the instructions described below:

Step 1: Place your Gigabit Ethernet Switch on a hard flat surface, with the front panel positioned towards your front side.

Step 2: Attach a rack-mount bracket to each side of the Switch with supplied screws attached to the package. Figure 5 shows how to attach brackets to one side of the Gigabit Ethernet Switch.

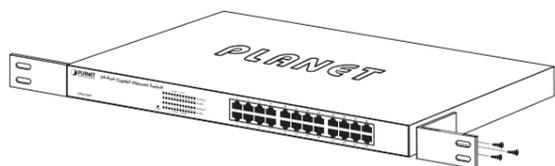


Figure 5: Attaching the brackets to the Gigabit Ethernet Switch

Caution:

You must use the screws supplied with the mounting brackets. Damage caused to the parts by using incorrect screws would invalidate your warranty.

Step 3: Secure the brackets tightly.

Step 4: Follow the same steps to attach the second bracket to the opposite side.

Step 5: After the brackets are attached to the Gigabit Ethernet Switch, use suitable screws to securely attach the brackets to the rack, as shown in Figure 6.

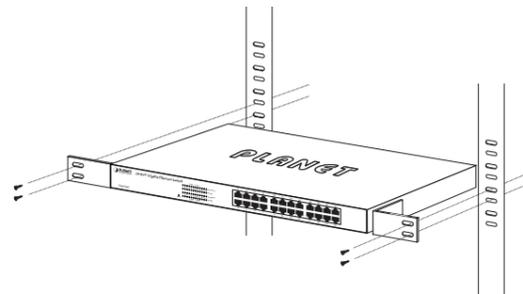


Figure 6: Mounting the Gigabit Ethernet Switch in a Rack

Step 6: Proceed with Steps 4 and 5 of Desktop Installation to connect the network cabling and supply power to your Gigabit Ethernet Switch.

Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource on PLANET Web site first to check if it could solve your issue. If you need more support information, please contact PLANET switch support team.

PLANET online FAQ:
<http://www.planet.com.tw/en/support/faq.php?type=1>

Switch support team mail address:
support_switch@planet.com.tw

Copyright © PLANET Technology Corp. 2016

Contents are subject to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp. All other trademarks belong to their respective owners.

Gigabit Switch

GSW-1601/GSW-2401

www.PLANET.com.tw

16/24-Port Gigabit Ethernet Switch



PLANET Technology Corp.
 11F., No. 96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan



Energy Saving Note of the Device

This power required device does not support Standby mode operation. For energy saving, please remove the power cable to disconnect the device from the power circuit. Without removing power cable, the device will still consume power from the power source. In view of Saving the Energy and reducing the unnecessary power consumption, it is strongly suggested to remove the power connection for the device if this device is not intended to be active.

2011-A50140-005



EC Declaration of Conformity

For the following equipment:

*Type of Product : 16/24-Port 10/100/1000T Gigabit Ethernet Switch
 *Model Number : GSW-1601, GSW-2401

* Produced by:
 Manufacturer's Name : Planet Technology Corp.
 Manufacturer's Address : 10F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

is herewith confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility Directive on 2014/30/EU; Low Voltage Directive 2014/35/EU.

For the evaluation regarding the EMC, the following standards were applied:

EN 55022	(2010 / AC:2011)
EN 61000-3-2	(2014)
EN 61000-3-3	(2013)
EN 55024	(2010)
IEC 61000-4-2	(2008)
IEC 61000-4-3	(2006+A1:2007+A2:2010)
IEC 61000-4-4	(2012)
IEC 61000-4-5	(2014)
IEC 61000-4-6	(2013)
IEC 61000-4-8	(2009)
IEC 61000-4-11	(2004)
EN 60950-1	(2006+A11:2009+A1:2010+A12:2011+A2: 2013)

Responsible for marking this declaration if the:

Manufacturer Authorized representative established within the EU

Authorized representative established within the EU (if applicable):

Company Name: Planet Technology Corp.

Company Address: 10F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

Person responsible for making this declaration

Name, Surname: Kent Kang

Position / Title: Director

Taiwan
Place

7 Oct. 2016
Date

Kent Kang
Legal Signature

PLANET TECHNOLOGY CORPORATION

e-mail: sales@planet.com.tw http://www.planet.com.tw
 10F., No.96, Minquan Rd., Xindian Dist., New Taipei City, Taiwan, R.O.C. Tel:886-2-2219-9518 Fax:886-2-2219-9528