

14AWG 2 CONDUCTOR PLENUM RATED




DESCRIPTION

14/2 Stranded Bare Copper Conductors, Unshielded with an overall jacket. Plenum Rated, 1000ft, Pull Box

FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Supplied in a 1000ft Pull Box

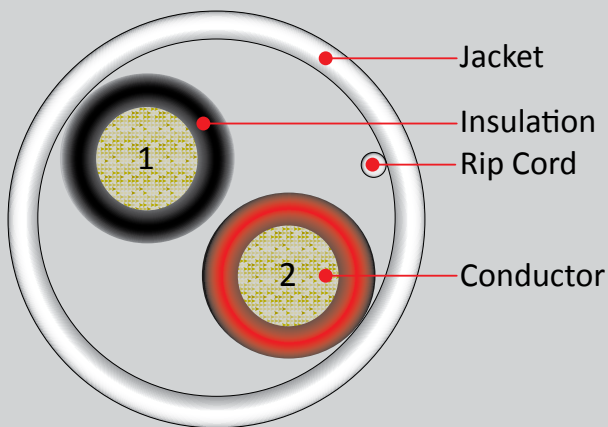

SKU: 211-142/P/WH

Conductor

Material	Bare Copper
Size	14AWG
Stranding	19 Strand (19x0.0142in., 19x0.361mm)
Conductors	2 Conductor

Insulation

Material	PL-PVC
Thickness	0.094 in. (2.38mm) Nominal
Colors	Black, Red
Ripcord	Yes

Jacket

Material	PL-PVC
Thickness	0.0173 in. (0.44mm) Nominal
Overall Diameter	0.222 in. (5.64mm) Nominal
Color	White

Electrical Properties

Temp. Rating	-20°C ~ +75°C
DCR Conductor	8.6 Ohms/Km. @ 20°C

Ratings/Approvals

NEC Article 800, UL Subject 444, CMP/CL2P (UL), RoHS Compliant

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2014

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.