

# HDMI 1.4 TO MINI HDMI M/M CABLE



<b>SKUS</b>	VC-654AA	(1.5')	VC-654L	(10')
	VC-654S	(3')	VC-654E	(15')
	VC-654G	(6')		

**AVAILABLE COLOUR**



## FEATURES

- HDMI 1.4 Type A Male to Type C Male Copper Braided High Speed with Ethernet Cable
- 15 micron hardened gold-plated contacts (24k) for superior transmission, high reliability and durability
- Supports 4K x 2K video (3840x2160p at 24Hz/25Hz/30Hz and 4096x2160p at 24Hz) and dual direction 1080p
- Three layer high density shielding for quality protection
- Twisted pair construction
- The addition of a HDMI Ethernet Channel allows IP enabled devices to communicate without a separate Ethernet cable
- An Audio Return Channel is included to allow the sending of audio data “upstream” from the TV to a surround sound audio system or A/V receiver, eliminating the need for a separate S/PDIF connection
- Support for 3 additional color spaces deliver sharper and higher quality digital still photography when viewed on an HDTV


## SPECIFICATIONS

ROHS COMPLIANT   CABLE LENGTH UNLESS OTHER SPEC. TOLERANCES:	
0 - 200mm	±10mm
201 - 1000mm	±20mm
1001 - 1500mm	±25mm
1501 - 2100 mm	±30mm
2100 mm -	±40mm

© PC Cable World. All rights reserved.

*PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.*

# HDMI 1.4 TO MINI HDMI M/M CABLE

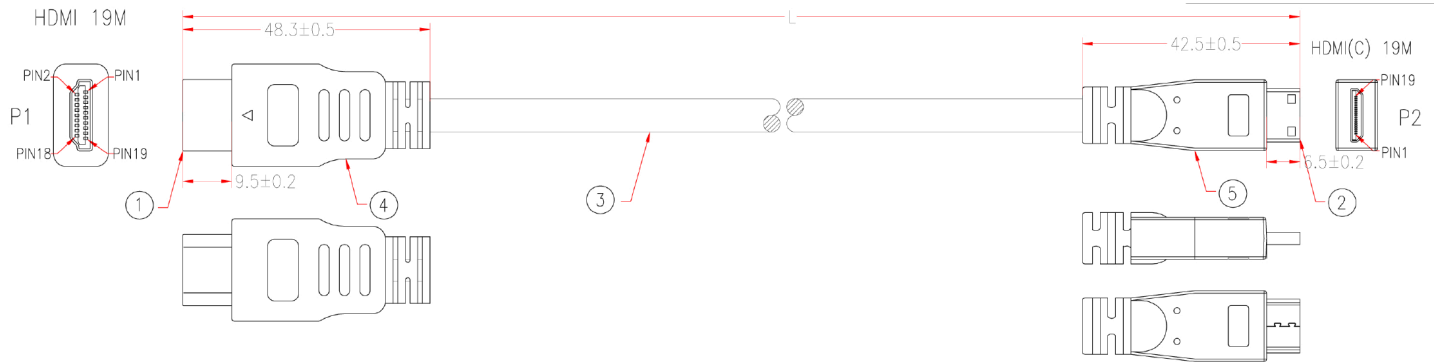

9187			
P1	P2	P1	P2
1	2	13	14
3	3	15	15
2	1	16	16
4	5	18	18
6	6	SHIELD	SHIELD
5	4		
7	8		
9	9		
8	7		
10	11		
12	12		
11	10		
14	17		
19	19		
17	13		

## MATERIALS

(1)	HDMI 19 MALE 30AWG, Gold Plating 3u" on Contacts & Gold Connector, Black Insulator	
(2)	HDMI 19 C MALE 30AWG, Gold Plating 3u" on Contact & Gold Connector, Black Insulator	
(3)	UL20276 [(30AWG*1Pair+AL+D+MY)*5Pcs+(30AW-G*4C)+AM+AMA Braid HDMI 1.4, OD 6.5mm, Jacket Black	
	Molded PVC Black	(5)
	Molded PE Colour Transparent	Molded PVC Black
	Molded PP Colour Transparent	Molded PE Colour Transparent
(4)	Copper Foil 33*60mm	Molded PP Colour Transparent
	Black Heat Shrink Tube ø0.8*5mm	Copper Foil 33*60mm
	Black Heat Shrink Tube ø2.5*4mm	Black Heat Shrink Tube ø0.8*5mm
		Black Heat Shrink Tube ø2.5*4mm

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.